




HP Everyday Matte Polypropylene, 2 Pack



The HP Designjet printing system—the complete solution

HP Designjet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

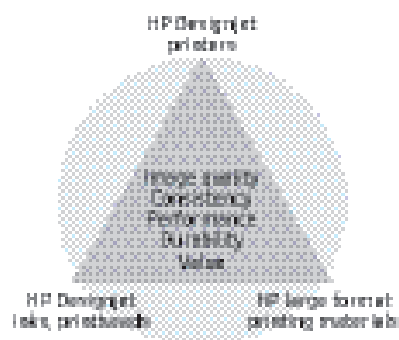

Print durable, high-impact signs

Produce high-impact signs with vibrant color

Produce retail and POP signage and event displays with vibrant color and eye-catching image quality. This matte polypropylene provides excellent versatility and value across a wide range of indoor and outdoor applications. And it's recyclable.¹

Print, use, handle, and laminate with ease

Maintain peak productivity. HP Everyday Matte Polypropylene is easy to use and handle, whether you're doing a quick print run or large production runs. Post-print processing is smooth and easy with this tear-resistant substrate.

Deliver durable output for indoor or outdoor use

To provide durable, long-lasting prints, Original HP printing materials are designed together with Original HP ink formulations. Prints achieve indoor, in-window display permanence up to 6 months;² outdoor display permanence up to 3 months.³

¹ HP Large Format Media take-back program availability varies. Recycling programs may not exist in your area. See globalbmj.com/hp/ecosolutions for details.

² Using Original HP 70 Photo Inks or HP 83 UV inks. Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12hr day. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see globalBMG.com/hp/t/printpermanence.

³ Using Original HP 70 or 91 Photo Inks or HP 83 UV inks. Display permanence rating by HP Image Permanence Lab. Outdoor display permanence tested according to SAE J2527; in a vertical display orientation in simulated nominal outdoor display conditions for select high and low climates, including exposure to direct sunlight and water; performance may vary as environmental conditions change. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see globalBMG.com/hp/t/printpermanence.

⁴ Requires 2-inch spindle for compatibility with the HP Designjet L25500 and L26500 Printer series.

| Target customers | Applications | Benefits |
|--------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------|
| Print service providers | POP/POS signs | Indoor and outdoor versatility |
| Retail store in-house printing | Retail displays | Tear resistance for easier handling |
| Event designers | Event and trade show displays | Display permanence in-window up to 6 months, ² outdoor up to 3 months ³ |
| Advertising agencies | Posters | Broad HP Designjet printer compatibility ⁴ |
| Geographic Information Systems (GIS) | | Recyclable through the HP Large Format Media take-back program ¹ |
| Government (printing maps) | | Compatible with HP dye- and pigment-based inks |

Technical specifications



HP Everyday Matte Polypropylene, 2 Pack

For the latest ICC/media profiles and a variety of resources to help you get the most out of your printer and HP large format printing materials, please visit globalBMG.com/hp/.

| | | | | | |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------|------------------|-----------------------|
| Weight | 120 g/m² per ISO 536 Test Method | | | | |
| Thickness | 203 microns/8 mil per ISO 534 Test Method | | | | |
| Opacity | Greater than 96% per TAPPI T-425 Test Method | | | | |
| Brightness | Greater than 101% per ISO 2470 Test Method | | | | |
| Whiteness | Greater than 113 per ISO 11476 Test Method | | | | |
| Finish | Matte | | | | |
| Operating temperature | 15 to 30° C / 59 to 86° F | | | | |
| Operating humidity | 20 to 80% RH | | | | |
| Display permanence (Commercial in-window) | Up to 6 months with Original HP 70 Photo Inks or HP 83 UV inks² | | | | |
| Display permanence (Outdoor) | Up to 3 months with Original HP 70 or 91 Photo Inks or HP 83 UV inks³ | | | | |
| Water resistance | Water resistant³ | | | | |
| Dry time | 11 minutes (at 23° C, 50% RH) | | | | |
| Lamination | Yes, cold | | | | |
| Shelf life | 1 year, unopened in original packaging | | | | |
| Storage temperature | 0 to 40° C / 32 to 104° F | | | | |
| Storage humidity | 5 to 80% RH | | | | |
| Recyclability | Recyclable through the HP Large Format Media take-back program¹ | | | | |
| Country of origin | Product of China | | | | |
| Ordering information | Product numbers | Quantity | Roll sizes | UPC Codes | Region |
| | CH022A⁴ | 2 Pack | 610 mm x 30,5 m (24 in x 100 ft) | 848412013047 | North America, Europe |
| | CH023A⁴ | 2 Pack | 914 mm x 30,5 m (36 in x 100 ft) | 848412013054 | North America, Europe |
| | CH025A⁴ | 2 Pack | 1067 mm x 30,5 m (42 in x 100 ft) | 848412013061 | Worldwide |
| | CH026A⁴ | 2 Pack | 1270 mm x 30,5 m (50 in x 100 ft) | 848412013078 | North America, Europe |
| | CH027A⁴ | 2 Pack | 1524 mm x 30,5 m (60 in x 100 ft) | 848412013085 | North America, Europe |
| | CH024A⁴ | 2 Pack | 914 mm x 61 m (36 in x 200 ft) | 848412013092 | Americas, Europe |
| Warranty | HP large format printing materials are free from defects in materials and workmanship. For warranty statement please see globalBMG.com/hp/MediaWarranties . | | | | |

¹ HP Large Format Media take-back program availability varies. Recycling programs may not exist in your area. See globalbm.com/hp/ecosolutions for details.

² Using Original HP 70 Photo Inks or HP 83 UV inks. Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12hr day. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see globalBMG.com/hp/t/printpermanence.

³ Using Original HP 70 or 91 Photo Inks or HP 83 UV inks. Display permanence rating by HP Image Permanence Lab. Outdoor display permanence tested according to SAE J2527; in a vertical display orientation in simulated nominal outdoor display conditions for select high and low climates, including exposure to direct sunlight and water; performance may vary as environmental conditions change. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see globalBMG.com/hp/t/printpermanence.

⁴ Requires 2-inch spindle for compatibility with the HP Designjet L25500 and L26500 Printer series.



For detailed information on the HP large format printing materials portfolio and to order, see globalBMG.com/hp/

