




# HP Everyday Matte Polypropylene, 2 Pack



## The HP Designjet printing system—the complete solution

HP Designjet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

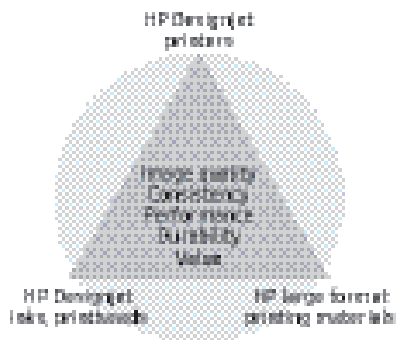

## Print durable, high-impact signs

### Produce high-impact signs with vibrant color

Produce retail and POP signage and event displays with vibrant color and eye-catching image quality. This matte polypropylene provides excellent versatility and value across a wide range of indoor and outdoor applications. And it's recyclable.<sup>1</sup>

### Print, use, handle, and laminate with ease

Maintain peak productivity. HP Everyday Matte Polypropylene is easy to use and handle, whether you're doing a quick print run or large production runs. Post-print processing is smooth and easy with this tear-resistant substrate.

### Deliver durable output for indoor or outdoor use

To provide durable, long-lasting prints, Original HP printing materials are designed together with Original HP ink formulations. Prints achieve indoor, in-window display permanence up to 6 months;<sup>2</sup> outdoor display permanence up to 3 months.<sup>3</sup>

<sup>1</sup> HP Large Format Media take-back program availability varies. Recycling programs may not exist in your area. See [globalbmg.com/hp/ecosolutions](http://globalbmg.com/hp/ecosolutions) for details.

<sup>2</sup> Using Original HP 70 Photo Inks or HP 83 UV inks. Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6,000 Lux/12hr day. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see [globalBGM.com/hp/t/printpermanence](http://globalBGM.com/hp/t/printpermanence).

<sup>3</sup> Using Original HP 70 or 91 Photo Inks or HP 83 UV inks. Display permanence rating by HP Image Permanence Lab. Outdoor display permanence tested according to SAE J2527; in a vertical display orientation in simulated nominal outdoor display conditions for select high and low climates, including exposure to direct sunlight and water; performance may vary as environmental conditions change. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see [globalBGM.com/hp/t/printpermanence](http://globalBGM.com/hp/t/printpermanence).

<sup>4</sup> Requires 2-inch spindle for compatibility with the HP Designjet L25500 and L26500 Printer series.

Target customers	Applications	Benefits
Print service providers	POP/POS signs	Indoor and outdoor versatility
Retail store in-house printing	Retail displays	Tear resistance for easier handling
Event designers	Event and trade show displays	Display permanence in-window up to 6 months, <sup>2</sup> outdoor up to 3 months <sup>3</sup>
Advertising agencies	Posters	Broad HP Designjet printer compatibility <sup>4</sup>
Geographic Information Systems (GIS)		Recyclable through the HP Large Format Media take-back program <sup>1</sup>
Government (printing maps)		Compatible with HP dye- and pigment-based inks

## Technical specifications



### HP Everyday Matte Polypropylene, 2 Pack

For the latest ICC/media profiles and a variety of resources to help you get the most out of your printer and HP large format printing materials, please visit [globalBMG.com/hp/](http://globalBMG.com/hp/).

<b>Weight</b>	120 g/m <sup>2</sup> per ISO 536 Test Method				
<b>Thickness</b>	203 microns/8 mil per ISO 534 Test Method				
<b>Opacity</b>	Greater than 96% per TAPPI T-425 Test Method				
<b>Brightness</b>	Greater than 101% per ISO 2470 Test Method				
<b>Whiteness</b>	Greater than 113 per ISO 11476 Test Method				
<b>Finish</b>	Matte				
<b>Operating temperature</b>	15 to 30° C / 59 to 86° F				
<b>Operating humidity</b>	20 to 80% RH				
<b>Display permanence (Commercial in-window)</b>	Up to 6 months with Original HP 70 Photo Inks or HP 83 UV inks <sup>2</sup>				
<b>Display permanence (Outdoor)</b>	Up to 3 months with Original HP 70 or 91 Photo Inks or HP 83 UV inks <sup>3</sup>				
<b>Water resistance</b>	Water resistant <sup>3</sup>				
<b>Dry time</b>	11 minutes (at 23° C, 50% RH)				
<b>Lamination</b>	Yes, cold				
<b>Shelf life</b>	1 year, unopened in original packaging				
<b>Storage temperature</b>	0 to 40° C / 32 to 104° F				
<b>Storage humidity</b>	5 to 80% RH				
<b>Recyclability</b>	Recyclable through the HP Large Format Media take-back program <sup>1</sup>				
<b>Country of origin</b>	Product of China				
<b>Ordering information</b>	<b>Product numbers</b>	<b>Quantity</b>	<b>Roll sizes</b>	<b>UPC Codes</b>	<b>Region</b>
	CH022A <sup>4</sup>	2 Pack	610 mm x 30,5 m (24 in x 100 ft)	848412013047	North America, Europe
	CH023A <sup>4</sup>	2 Pack	914 mm x 30,5 m (36 in x 100 ft)	848412013054	North America, Europe
	CH025A <sup>4</sup>	2 Pack	1067 mm x 30,5 m (42 in x 100 ft)	848412013061	Worldwide
	CH026A <sup>4</sup>	2 Pack	1270 mm x 30,5 m (50 in x 100 ft)	848412013078	North America, Europe
	CH027A <sup>4</sup>	2 Pack	1524 mm x 30,5 m (60 in x 100 ft)	848412013085	North America, Europe
	CH024A <sup>4</sup>	2 Pack	914 mm x 61 m (36 in x 200 ft)	848412013092	Americas, Europe
<b>Warranty</b>	HP large format printing materials are free from defects in materials and workmanship. For warranty statement please see <a href="http://globalBMG.com/hp/MediaWarranties">globalBMG.com/hp/MediaWarranties</a> .				

<sup>1</sup> HP Large Format Media take-back program availability varies. Recycling programs may not exist in your area. See [globalbmg.com/hp/ecosolutions](http://globalbmg.com/hp/ecosolutions) for details.

<sup>2</sup> Using Original HP 70 Photo Inks or HP 83 UV inks. Interior in-window display ratings by HP Image Permanence Lab on a range of HP media. HP predictions based on test data under Xenon-Arc illuminant-calculation assumes 6,000 Lux/1 Zhr day. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see [globalBMG.com/hp/t/printpermanence](http://globalBMG.com/hp/t/printpermanence).

<sup>3</sup> Using Original HP 70 or 91 Photo Inks or HP 83 UV inks. Display permanence rating by HP Image Permanence Lab. Outdoor display permanence tested according to SAE J2527; in a vertical display orientation in simulated nominal outdoor display conditions for select high and low climates, including exposure to direct sunlight and water; performance may vary as environmental conditions change. Prints require cold lamination to achieve prolonged display permanence on compatible HP Designjet printers using HP dye-based inks. For more information, see [globalBMG.com/hp/t/printpermanence](http://globalBMG.com/hp/t/printpermanence).

<sup>4</sup> Requires 2-inch spindle for compatibility with the HP Designjet L25500 and L26500 Printer series.



For detailed information on the HP large format printing materials portfolio and to order, see [globalBMG.com/hp/](http://globalBMG.com/hp/)

