





APC Power-Saving Back-UPS Pro 1500, 230V, Schuko
Part Number: BR1500G-GR




[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Options](#) [Ratings and Reviews](#)

Output


Output Power Capacity	865 Watts / 1500 VA	
Max Configurable Power	865 Watts / 1500 VA	
Nominal Output Voltage	230V	
Efficiency at Full Load	98.8%	
Output Frequency (sync to mains)	50/60Hz +/- 3 Hz	
Topology	Line Interactive	
Output Connections	(3) Schuko CEE 7 (Battery Backup) (3) Schuko CEE 7 (Surge Protection)	 
Efficiency at Half Load	98.2%	

Input

Nominal Input Voltage	230V	
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)	
Input Connections	Schuko CEE 7/7P	
Cord Length	1.83 meters	
Input voltage range for main operations	176 - 294V	
Input voltage adjustable range for mains operation	156 - 300V	

Batteries & Runtime

Typical recharge time	8 hour(s)
Replacement Battery	APCRBC124 , APCRBC124J
RBC™ Quantity	1
Runtime Graph	

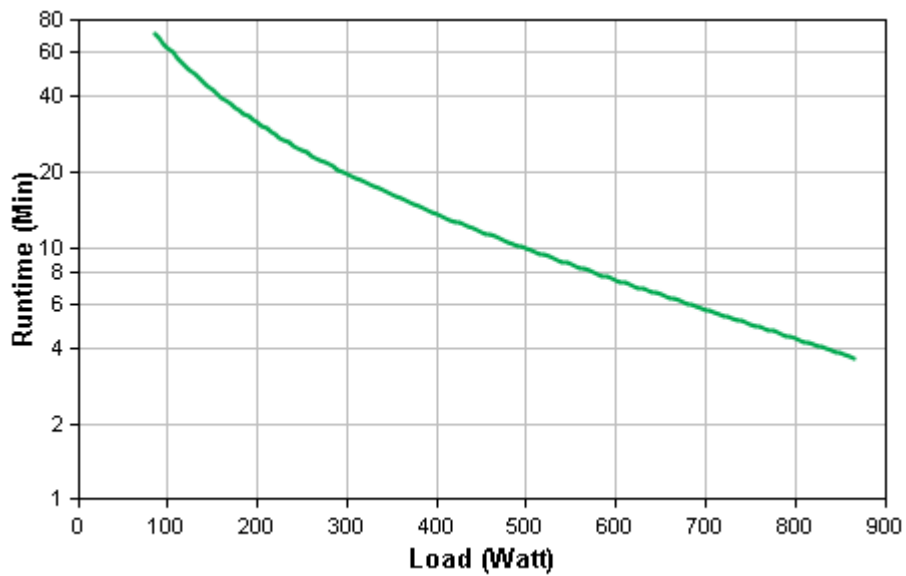

WebCharts3D Invalid license

Hover over the line on the graph above to view the runtime at any desired load

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#) [View Runtime Chart](#)

Communications & Management

Interface Port(s)	Optional Simple Signalling RS232 cable, USB
Control panel	Multi-function LCD status and control console

Surge Protection and Filtering

Surge energy rating	441 Joules
Data Line Protection	RJ-11 Modem/Fax/DSL protection (two wire single line), RJ-45 Modem/Fax/DSL protection (four wire dual line)

Physical

Maximum Height	301.00 mm
Maximum Width	112.00 mm
Maximum Depth	382.00 mm
Net Weight	13.00 KG
Shipping Weight	13.80 KG
Shipping Height	390.00 mm
Shipping Width	235.00 mm
Shipping Depth	490.00 mm
Units per Pallet	20.00

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	45.00 dBA
Conformance	
Regulatory Approvals	BSI 1363, CE, NEMKO
Standard Warranty	2 years repair or replace, 3 years repair or replace for European Union countries
Sustainable Offer Status	
RoHS	Compliant
REACH	REACH: Contains No SVHCs

**The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.