




APC Smart-UPS RT 3000VA RM 230V  
Part Number: SURTD3000RMXLI



[Technical Specifications](#)   [Product Overview](#)   [Documentation](#)   [Software & Firmware](#)   [Options](#)   [Ratings and Reviews](#)

Output		
Output Power Capacity	2100 Watts / 3000 VA	
Max Configurable Power	2100 Watts / 3000 VA	
Nominal Output Voltage	230V	
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage	
Output Voltage Distortion	Less than 3%	
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz user adjustable +/- 0.1	
Other Output Voltages	220, 240	
Crest Factor	3 : 1	
Topology	Double Conversion Online	
Waveform Type	Sine wave	
Output Connections	(8) IEC 320 C13 (2) IEC 320 C19 (2) IEC Jumpers	
Bypass	Internal Bypass (Automatic and Manual)	
Input		
Nominal Input Voltage	230V	
Input Frequency	50/60 Hz +/- 5 Hz (auto sensing)	
Input Connections	British BS1363A IEC-320 C20	

Schuko CEE 7/EU1-16P


Cord Length	2.44 meters
Input voltage range for main operations	160 - 280V
Input voltage adjustable range for mains operation	100 - 280V
Other Input Voltages	220, 240

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Included Battery Modules	2
Typical recharge time	2.50 hour(s)
Replacement Battery	<a href="#">RBC44</a>
RBC™ Quantity	1
Extended Run Options	<a href="#">APC Smart-UPS RT 3000VA RM 230V</a>

Runtime Graph

Curve	Part Number(s)
A	SURTD3000RMXLI
B	SURTD3000RMXLI + (1)SURT192RMXLBP
C	SURTD3000RMXLI + (2)SURT192RMXLBP
D	SURTD3000RMXLI + (3)SURT192RMXLBP
E	SURTD3000RMXLI + (4)SURT192RMXLBP

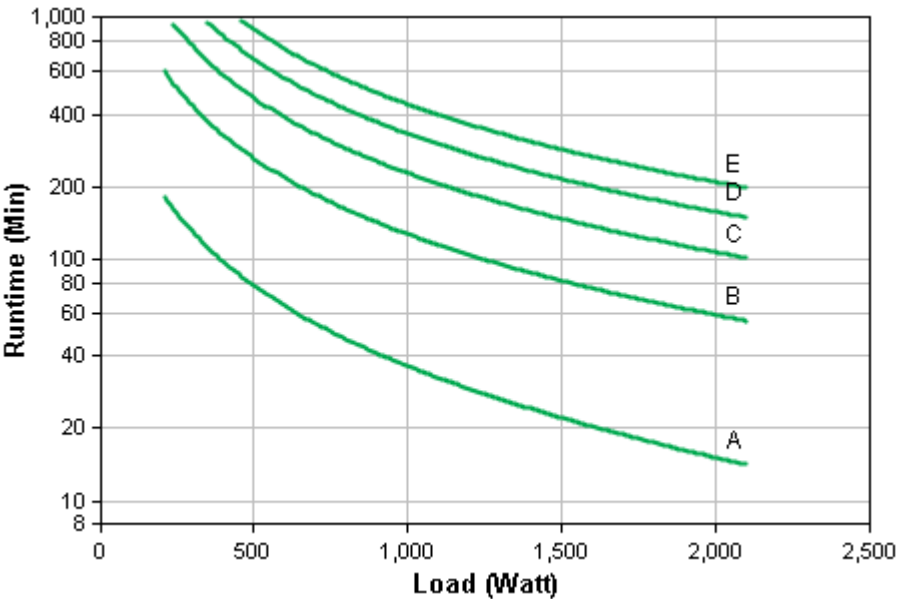

Hover over the line on the graph above to view the runtime at any desired load


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

## Energy Use/Efficiency

Load	Efficiency
25%	86.4%
50%	90.3%
75%	91.3%
100%	91.6%

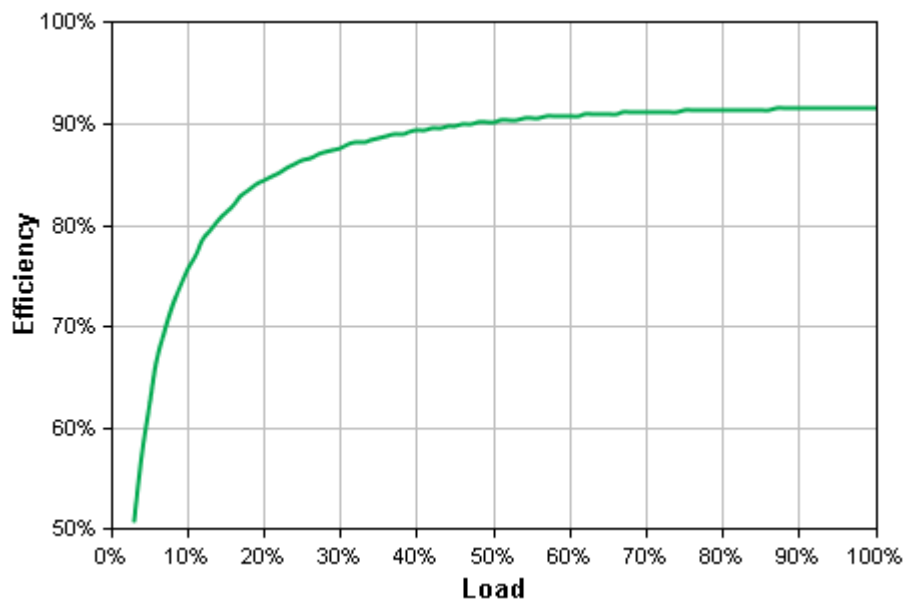

Hover over the line on the graph above to view the efficiency at any desired load

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

## Communications & Management

Interface Port(s)	RJ-45 Serial, SmartSlot
Available SmartSlot™ Interface Quantity	1
Control panel	LED status display with load and battery bar-graphs and On Line : On Battery : Replace Battery : Overload and Bypass Indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency Power Off (EPO)	Yes

## Surge Protection and Filtering

Surge energy rating	555J Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	130.00 mm
Maximum Width	432.00 mm
Maximum Depth	660.00 mm
Rack Height	3U
Net Weight	54.55 KG
Shipping Weight	63.64 KG
Shipping Height	347.00 mm
Shipping Width	603.00 mm
Shipping Depth	980.00 mm
Master Carton Units	1.00
Color	Black
Units per Pallet	6.00

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95% no%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95% no%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	55.00 dBA
Online Thermal Dissipation	609.00 BTU/hr
Protection Class	IP 20

Conformance

Regulatory Approvals	BSMI, C-tick, CE, CSA, EN 50091-1, EN 50091-2, EN 55022 Class A, EN 60950, EN 61000-3-2, GOST, JEON, OSHPD, UL 1778, VDE, VCCI
Standard Warranty	2 years repair or replace

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs

\*\*The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.