




HP Universal Adhesive Vinyl, 2 Pack



The HP Designjet printing system—the complete solution

HP Designjet and HP Scitex Printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

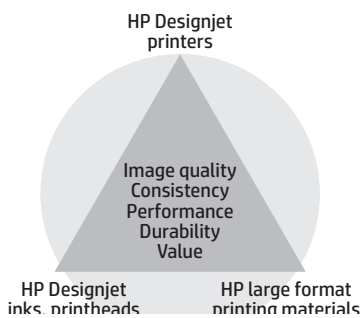

¹ With Original HP 771 Vivid Photo Inks and Original HP 91 Photo Inks. Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhem Imaging Research, Inc. on a range of HP media. For more information, see globalBMG.com/hp/t/printpermanence.

Quality prints for day-to-day production

Offer a range of indoor and outdoor displays

Produce quality color for your day-to-day production needs. Eye-catching displays—with a permanent, pressure-sensitive adhesive—are ideal for both indoor and outdoor applications.

See application and finishing versatility

Designed for a variety of applications and finishing techniques, HP Universal Adhesive Vinyl is a highly versatile media compatible with a variety of laminates to meet a wide range of application needs. See over 75 years indoor display permanence¹.

Enjoy quick post-print processing

Gain efficiency. ICC profiles help you get the color you need quickly. Fast dry time helps keep your workflow moving.

Target customers	Applications	Benefits
Advertising agencies	Indoor and outdoor	Outstanding image quality for day-to-day production
Graphic artists	POP and retail displays	Fast dry time
Sign shops	Banners	75+ years unlaminated indoor display permanence on HP Designjet Z-series printers ¹
Print service providers		Designed for a range of applications and finishing methods

Technical specifications



HP Universal Adhesive Vinyl, 2 Pack

For the latest ICC profiles/paper presets and a variety of resources to help you get the most out of your printer and HP large format materials, please visit globalBMG.com/hp/.

Weight (without liner)	150 g/m ² per ISO 536 Test Method			
Weight (with liner)	290 g/m ² per ISO 536 Test Method			
Thickness (without liner)	139 microns/5.5 mil per ISO 534 Test Method			
Thickness (with liner)	289 microns/11.4 mil per ISO 534 Test Method			
Opacity (with liner)	Greater than 96% per TAPPI T-425 Test Method and ISO 2471 Test Method			
Finish	Matte			
Operating temperature	15 to 35° C / 59 to 95° F			
Operating humidity	20 to 80% RH			
Display permanence (Indoor home or office)	75+ years, unlaminated with Original HP 771 Vivid Photo Inks and Original HP 91 Photo Inks ¹			
Water resistance	Moderately water resistant with Original HP 771 Vivid Photo Inks, Original HP 91 Photo Inks, and Original HP 70 Photo Inks on the HP Designjet Z3200 Photo Printer series ²			
Dry time	Less than 5 minutes (at 23° C, 50% RH)			
Lamination	Yes			
Shelf life	2 years, unopened in original packaging			
Storage temperature	15 to 35° C / 59 to 95° F			
Storage humidity	15 to 30% RH			
Country of origin	Product of China			
Ordering information	Product numbers	Roll sizes	UPC codes	Region
	C2T51A	914 mm x 20 m (36 in x 66 ft)	848412013627	North America, Europe
	C2T52A	1067 mm x 20 m (42 in x 66 ft)	848412013634	North America, Europe
Warranty	HP large format printing materials are free from defects in materials and workmanship. For warranty statement please see globalBMG.com/hp/MediaWarranties .			

¹ Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. on a range of HP media. For more information, see globalBMG.com/hp/t/printpermanence.

² Water resistance testing by HP Image Permanence Lab on a range of HP media and follows ISO 18935 method. For more information, see: globalBMG.com/hp/t/printpermanence.

For detailed information on the HP large format printing materials portfolio and to order, see globalBMG.com/hp

